


DGS40/127L(B) Mine Flameproof Projection Lamp (Mining Face Lighting)

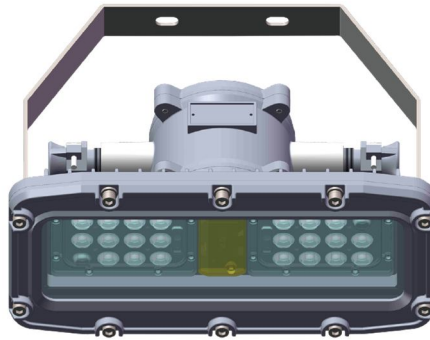

- Adopts an integrated cast steel shell, which has the characteristics of high earthquake resistance and impact resistance.
- Adopt high-quality LED, high luminous efficiency, low luminous decay and long life.
- Professional lens light distribution design, superior light-gathering performance, long illuminating distance.
- Applicable to places where there is danger of gas and coal dust explosion in underground coal mine.

Specification

Technical parameters		
Rated power	30W	40W
Operating voltage	AC(85-265VY)	
Power factor	>0.9	
Rated luminous flux	>2650Lm	>3350Lm
Terminal thread	>150Lx	
	G3/4	
Cable outside diameter	φ10~φ15mm	
Color temperature	4500K~6000K, User-optional	
CRI	>70	
Explosion-proof type	Exd 1 Mb	
Dimensions	340*150*250mm	
Weight	8.5kg	
Optional device	Explosion-proof pipe joint, installing support	
Product certification	MA certificate No.	\
	Explosion proof certificate No.	\